


BelCanto IR Multi-Device Remote, DAC Mode - (IDH = 01, IDL = 1A) (Software Revisions 2.00 and later)

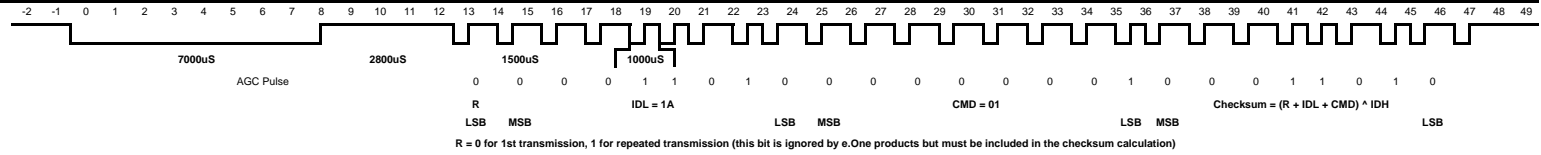

Button	CMD	DAC3 Function	CDP Function	
STBY	0x0a	Standby Toggle		1A 0A 25
DISPLAY	0x0b	Display On/Off		1A 0B 24
ONE	0x01	Select Input 1		1A 01 1A
TWO	0x02	Select Input 2		1A 02 1D
THREE	0x03	Select Input 3		1A 03 1C
FOUR	0x04	Select Input 4		1A 04 1F
FIVE	0x05	Select Input 5		1A 05 1E
SIX	0x06			1A 06 21
SEVEN	0x07			1A 07 20
EIGHT	0x08			1A 08 23
NINE	0x09			1A 09 22
ZERO	0x0d			1A 0D 26
MUTE	0x0c	Mute Toggle		1A 0C 27
PAUSE	0x1b		Pause	1A 1B 34
STOP	0x1d		Stop	1A 1D 36
CHUP	0x1c	Select Next Input		1A 1C 35
VOLUP	0x10	Volume Up 0.5dB		1A 10 2B
PLAY	0x1f		Play	1A 1F 38
VOLDN	0x1e	Volume Down 0.5dB		1A 1E 39
CHDN	0x12	Select Previous Input		1A 12 2D
PREV	0x11		Previous Track	1A 11 2A
NEXT	0x13		Next Track	1A 13 2C
REW	0x14		Rewind	1A 14 2F
RPT1	0x15		Repeat Track	1A 15 2E
RPT ALL	0x16		Repeat Disc	1A 16 31
FFW	0x17		Fast Forward	1A 17 30
BALL	0x18			1A 18 33
TIME	0x19		Time/Track Toggle	1A 19 32
PHASE	0x20			1A 20 3B
BALR	0x21			1A 21 3A
	0x39	Soft Mute On		1A 39 52
	0x3a	Hard Mute On		1A 3A 55
	0x3b	Mute Off		1A 3B 54
	0x3c	Display On		1A 3C 57
	0x3d	Display Off		1A 3D 56
	0x3e	Standby On		1A 3E 59
	0x3f	Standby Off		1A 3F 58

R = 0 for 1st transmission, 1 for repeated transmission (this bit is ignored by e.One products but must be included in the checksum calculation)